

HZM



HZM 16G FRONT END LOADER

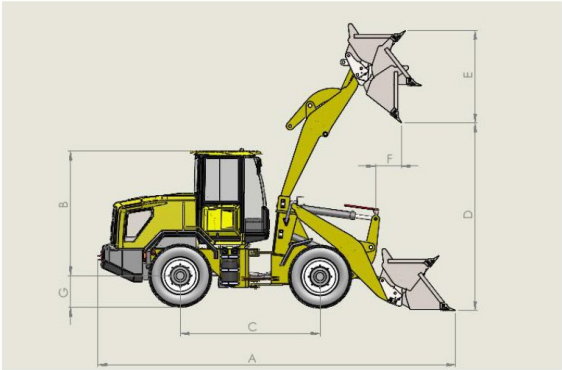


G-SERIES



HZM

SPECIFICATIONS

■ Engine			■ Operation Parameters		
Machine	16G		Operating Weight	kg	4000
Model	Yunnei YN27GBZ		Max.Rated Load	kg	1600
Net Peak Power	58kw(78.8hp)@2400rpm		Bucket Capacity	cbm	0.4
Type	Direct Injection,Water Cooled		D Max.Dumping Height	mm	3200
No. Of Cylinders	Diesel 4-cylinder Engine		E Max.Working Height	mm	3951
Fuel Tank Capacity	85Litres		F Min.Dumping Distance	mm	992
■ Transmission System			Max.Dumping Angle	degrees	40-45
Type	Hydraulic Transmission Box		Max.Tractive Force	Kgf	2273
Gears Forward/Reverse	2 Forward / 2 Reverse		Max.Breakout Force	kgf	2549
Travel Speed	Km/h	20-30	Hydraulic Flow Rate	L/min	90
Max.Torque	Nm		System Pressure	MPa	16
Transfer Case	4WD		Min.Turning Radius	mm	3358
Brake Control	Single Line , Air Brake		G Min.Ground Clearance	mm	440
■ Operation Dimensions					
A Total Travel Length	mm	5325			
B Total Travel Height	mm	2750			
Total Travel Width	mm	1950			
C Wheel Track	mm	2180			
Bucket Width	mm	1850			
Wheel Base	mm	1485			
■ Attachments					
Augers	Breakers	Brush Cutters	Buckets	Earth Drills	
Forks	Grapples	Rippers	Shears	And More	

*Under our policy of continuous improvement,we reserve the right to change technical data and design without prior notice.

