

HZM



HZM 20G FRONT END LOADER

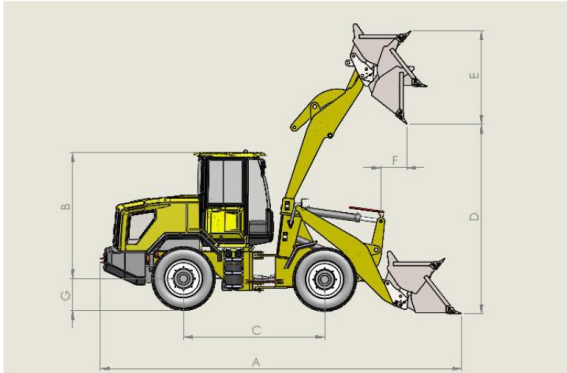


G-SERIES





SPECIFICATIONS

■ Engine			■ Operation Parameters		
Machine	20G		Operating Weight	kg	5300
Model	Yunnei YN38GBZ		Max.Rated Load	kg	2000
Net Peak Power	76kw(103.3hp)@2400rpm		Bucket Capacity	cbm	1.2
Type	Direct Injection,Water Cooled		D Max.Dumping Height	mm	3500
No. Of Cylinders	Diesel 4-cylinder Engine		E Max.Working Height	mm	4756
Fuel Tank Capacity	95Litres		F Min.Dumping Distance	mm	1142
■ Transmission System			Max.Dumping Angle	degrees	40-45
Type	Hydraulic Transmission Box		Max.Tractive Force	kgf	3220
Gears Forward/Reverse	2 Forward / 2 Reverse		Max.Breakout Force	kgf	4178
Travel Speed	Km/h	20-30	Hydraulic Flow Rate	L/min	125
Max.Torque	Nm		System Pressure	MPa	16
Transfer Case	4WD		Min.Turning Radius	mm	3627
Brake Control	Single Line , Air Brake		G Min.Ground Clearance	mm	520
■ Operation Dimensions					
A Total Travel Length	mm	5800			
B Total Travel Height	mm	2850			
Total Travel Width	mm	2100			
C Wheel Track	mm	2461			
Bucket Width	mm	2000			
Wheel Base	mm	1570			
■ Attachments					
Augers	Breakers	Brush Cutters	Buckets	Earth Drills	
Forks	Grapples	Rippers	Shears	And More	

*Under our policy of continuous improvement,we reserve the right to change technical data and design without prior notice.

