

HZM

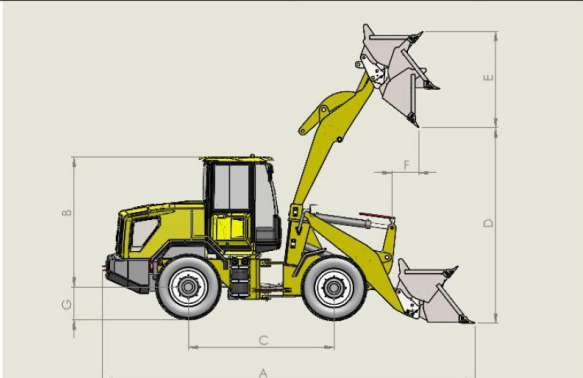


HZM 25G FRONT END LOADER



HZM

SPECIFICATIONS

■ Engine			■ Operation Parameters		
Machine	25G		Operating Weight	kg	5840
Model	Yunnei YN48GBZ		Max.Rated Load	kg	2500
Net Peak Power	92kw(125.1hp)@2400rpm		Bucket Capacity	cbm	1.3
Type	Direct Injection,Water Cooled		D Max.Dumping Height	mm	3600
No. Of Cylinders	Diesel 4-cylinder Engine		E Max.Working Height	mm	5090
Fuel Tank Capacity	95Litres		F Min.Dumping Distance	mm	1034
■ Transmission System			Max.Dumping Angle	degrees	40-45
Type	Hydraulic Transmission Box		Max.Tractive Force	kgf	3760
Gears Forward/Reverse	2 Forward / 2 Reverse		Max.Breakout Force	kgf	4718
Travel Speed	Km/h	20-30	Hydraulic Flow Rate	L/min	165
Max.Torque	Nm		System Pressure	MPa	16
Transfer Case	4WD		Min.Turning Radius	mm	5000
Brake Control	Single Line , Air Brake		G Min.Ground Clearance	mm	364
■ Operation Dimensions					
A Total Travel Length	mm	6400			
B Total Travel Height	mm	2950			
Total Travel Width	mm	2300			
C Wheel Track	mm	2725			
Bucket Width	mm	2200			
Wheel Base	mm	1640			
■ Attachments					
Augers	Breakers	Brush Cutters	Buckets	Earth Drills	
Forks	Grapples	Rippers	Shears	And More	

*Under our policy of continuous improvement,we reserve the right to change technical data and design without prior notice.

