

HZM



HZM 28G FRONT END LOADER

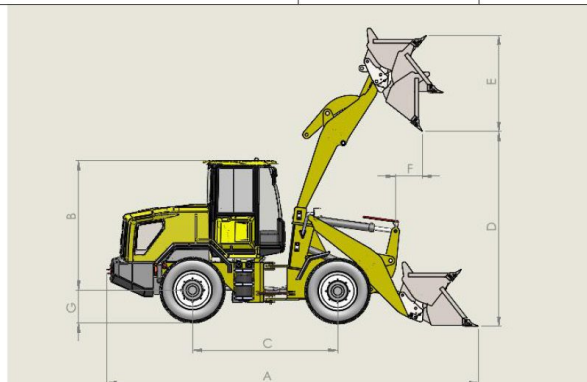


G-SERIES





SPECIFICATIONS

■ Engine			■ Operation Parameters		
Machine	28G		Operating Weight	kg	8200
Model	WEICHAI WP6G125E22		Max.Rated Load	kg	2800
Net Peak Power	92kw(125.1hp)@2200rpm		Bucket Capacity	cbm	1.5
Type	Direct Injection,Water Cooled		D Max.Dumping Height	mm	3700
No. Of Cylinders	Diesel 6-cylinder Engine		E Max.Working Height	mm	5788
Fuel Tank Capacity	110Litres		F Min.Dumping Distance	mm	931
■ Transmission System			Max.Dumping Angle	degrees	40-45
Type	Hydraulic Transmission Box		Max.Tractive Force	Kgf	4915
Gears Forward/Reverse	2 Forward / 2 Reverse		Max.Breakout Force	Kgf	8157
Travel Speed	Km/h	20-30	Hydraulic Flow Rate	L/min	165
Max.Torque	Nm		System Pressure	MPa	16
Transfer Case	4WD		Min.Turning Radius	mm	5300
Brake Control	Single Line , Air Brake		G Min.Ground Clearance	mm	570
■ Operation Dimensions					
A Total Travel Length	mm	7000			
B Total Travel Height	mm	3060			
Total Travel Width	mm	2300			
C Wheel Track	mm	2552			
Bucket Width	mm	2200			
Wheel Base	mm	1690			
■ Attachments					
Augers	Breakers	Brush Cutters	Buckets	Earth Drills	
Forks	Grapples	Rippers	Shears	And More	

*Under our policy of continuous improvement,we reserve the right to change technical data and design without prior notice.

